

3401 & 3402 AC Branch Circuits with Main


3401 AC/DC Twelve DC Branch Circuits With Main

Seven AC Branch Circuits With Main 120 VAC 60 HZ, (or 240 VAC 50 HZ)


& 3402 AC/DC Eighteen DC Branch Circuits With Main Seven AC Branch Circuits With Main 120 VAC 60 HZ, (or 240 VAC 50 HZ)

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Panel mounted, isolated positive, negative, and grounding bus bars on DC breaker panels.
- Over 2000 interchangeable function labels available
- LED Indicators provided on all Premier Line Panels
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Hydraulic/magnetic, trip free Circuit Breakers.
- DC Voltage: 12V standard. 24V and 32V optional.
- AC Voltage and Shore Cord Current: 30 AMPS, 120 VAC, 60 HZ USA standard. Also available in 240 VAC, 50 HZ.
- DC Main Breakers: 50 AMPS - standard. Also available in 60, 80, or 100 A. Main breaker provides 3000 AMP interrupt capacity rating.
- AC Main Breakers: Shore: 30 AMP, 120 VAC, 60 HZ - standard. Also available in 16 AMP, 240 VAC, 50 HZ.
- AC Metering: 8-16 VDC expanded scale Voltmeter and 0-50 DCA internally shunted Ammeter - standard. Other scales, externally shunted Ammeters, and digital meters available.
- DC Metering: 0-150 VAC scale Voltmeter and 0-50 ACA scale Ammeter - standard. Other analog scales and digital meters are available
- Branch Circuits: Available in 5, 10, 15, 20, 25, 30, 40, and 50 AMPS.
- Dimensions: 3401: 13 3/4" W X 12 1/8" H X 3 1/2" D.
3402: 13 3/4" W X 13 5/8" H X 3 1/2" D.
- Color: Black is standard. Optional: White, Gray and Beige.

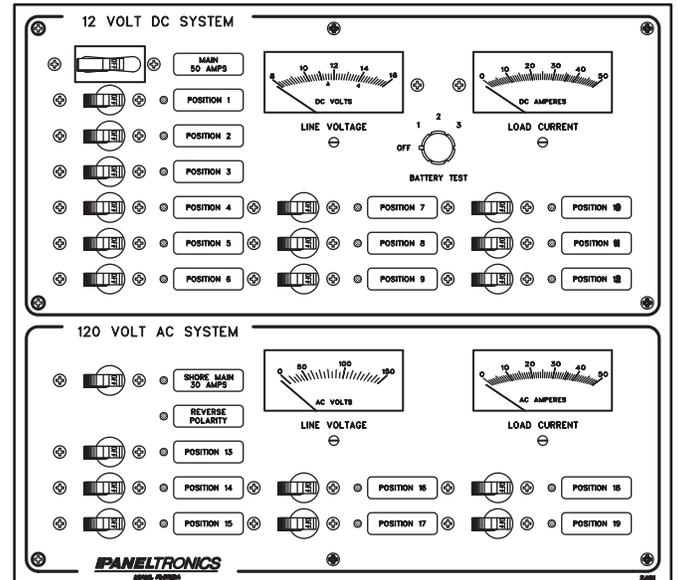

3401

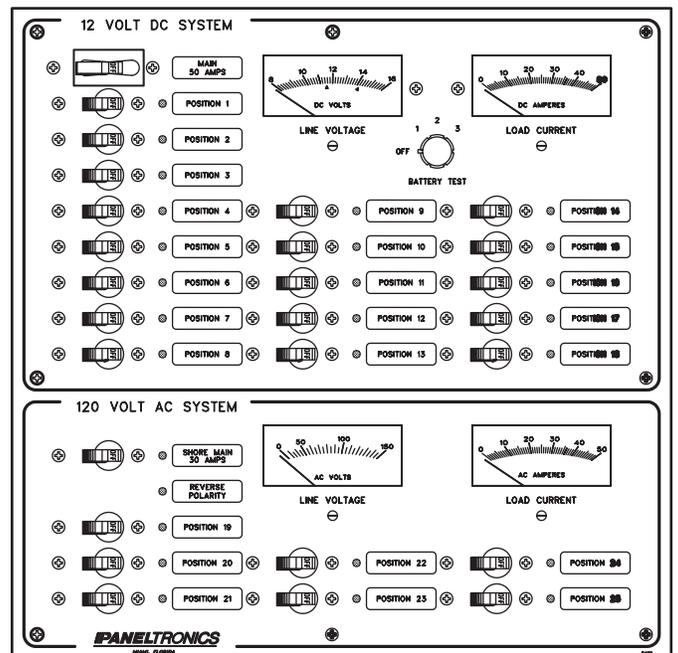

3402