


2309 & 2310 AC Source Selection Panels

2309 AC Source Selection Panel Shore Main/Parallel Bus A+B 120 /240 VAC

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Hydraulic/magnetic, trip free Circuit Breakers.
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels. Main Breakers: Shore: 30 AMPS, 120 VAC, 60 HZ standard. Also available in 240 VAC, 50 HZ.
- Voltage and Shore Cord Current: 30 AMPS, 120 VAC, 60 HZ USA standard. Other current ratings, voltages and frequencies optional.
- Main Breakers: Shore: 30 AMP, 120 VAC, 60 HZ standard. Also available 240 VAC, 50 HZ.
- Dimensions: 5 1/2 "W X 8 1/4 " H X 3 1/2 " D.
- Color: Black is standard. Optional: White, Gray and Beige.

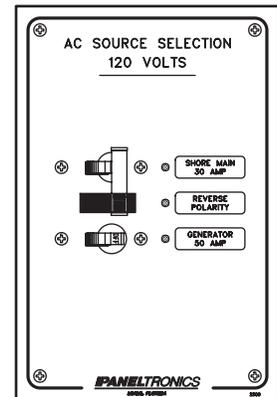


2309

2310 AC Source Selection Panel Shore Main/Parallel Bus A+B 120 /240 VAC

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Hydraulic/magnetic, trip free Circuit Breakers.
- Voltage and Shore Cord Current: 30 AMPS, 120 VAC-60 HZ USA is standard. Other current ratings, voltages and frequencies available.
- Main Breakers: Shore: 30 AMPS, 120 VAC, 60 HZ standard. Also available in 240 VAC, 50 HZ.
- Load Selector: parallel Bus A+B switch allows isolated hot and neutral buses to be supplied.
- Dimensions: 5 1/2 "W X 8 1/4 " H X 3 1/2 " D.
- Color: Black is standard. Optional: White, Gray and Beige.

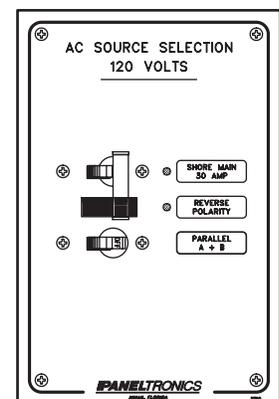

2310