

# 4301, 4302 & 4303 Branch Circuits


**4301 AC Four Branch Circuits 120 VAC 60 HZ, (or 240 VAC 50 HZ)**

**4302 AC Eight Branch Circuits 120 VAC 60 HZ, (or 240 VAC 50 HZ)**


**4304 AC Four Branch Circuits 240 VAC 60 HZ**

## GENERAL FEATURES & BENEFITS


- Completely pre-wired to reduce installation time
- Over 2000 Interchangeable function labels available.
- LED Indicators provided on all Premier Line Panels43
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- Voltage and Shore Cord Current: 30 AMPS, 120 VAC, 60 HZ USA standard. Also available in 240 VAC, 50 HZ.
- Branch Circuits: 5, 10, 15, 20, 25, 30, 40, and 50 A
- Dimensions: 17 3/4" W X 3 1/4" H X 3 1/2" D for 4301 & 4302 and 17 3/4" W X 4 3/4" H X 3 1/2" D for 4303.
- Color: Black is standard. Optional: White, Gray and Beige.

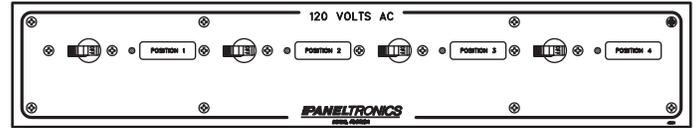

4301

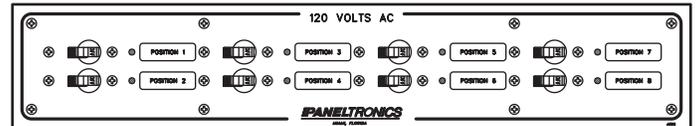

4302

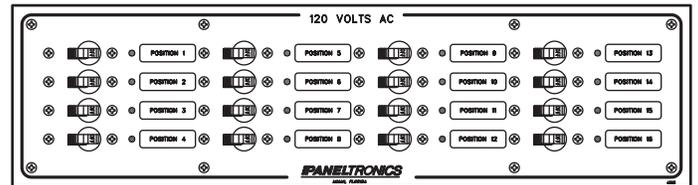

4303