

# 5301, 5302 & 5308 AC Branch Circuits

## 5301, 5302 & 5308 AC Branch Circuits

### GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- Over 2000 interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)

### 5301 AC - Specifications


- Shore Cord Voltage: 120 VAC-60 HZ USA is standard. Available in European style.
- Branch Circuits: Twelve circuits. Available in 5, 10, 15, 20, 25, 30, 40, and 50 A.
- Dimensions: 11" W x 6 1/2" H x 3 1/2" D.

### 5302 AC - Specifications


- Shore Cord Voltage: 120 VAC, 60 HZ USA standard. Also available in 240 VAC, 50 HZ.
- Branch Circuits: Twenty-four circuits. 5, 10, 15, 20, 25, 30, 40, and 50 AMP breakers are available
- Dimensions: 11" W x 11" H x 3 1/2 " D.

### 5308 AC - Specifications


- Shore Cord Voltage: 120 VAC, 60 HZ USA standard. Also available in 240 VAC, 50 HZ.
- Branch Circuits: Six circuits. Available in 5, 10, 15, 20, 25, 30, 40, and 50A.
- Dimensions: 11" W x 4 1/2 " x 3 1/2 " D.

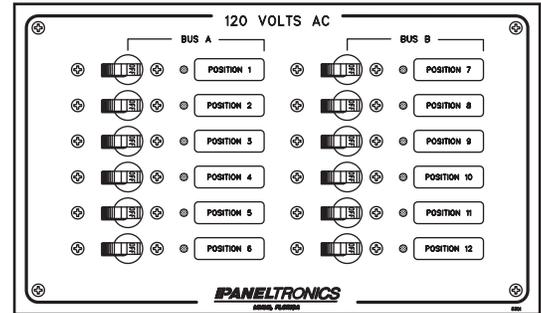

5301

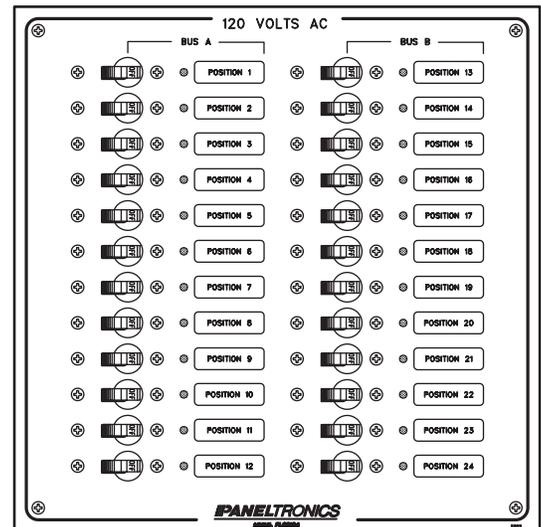

5302

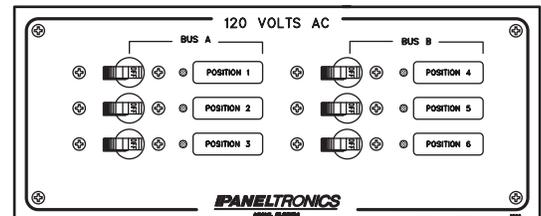

5308