



# WhisperPower diesel generator

**SC 6P**  
6 kW  
3.600 rpm



## Superior power systems for recreational and commercial craft



any air is needed for cooling, so the sets can be stowed away in the smallest of places. Almost all models are fitted with an electronic governor which results in an extremely stable output voltage and frequency. All WhisperPower models are supplied with Digital Diesel Controls (DDC) power system management, offering easy to understand information on operational status. Interfaces are available for bus connectivity including NMEA 2000.



### WhisperPower is the leading European manufacturer of "smart" power systems.

The comprehensive range of diesel generator systems, utilizing inverter technology and advanced power management, has been used for over 15 years by many yacht builders, commercial shipbuilders, vehicle manufacturers and various other markets throughout the world.

### Main characteristics of WhisperPower systems:

Compact, electronically controlled, ease of operation. The systems are supplied with metallic or polyester sound shield, ready to install, with all connections pre-fabricated. WhisperPower exhaust kits, fuel kits, water inlets kits and various other key installation components are supplied as optional kits and are available from stock. The extended range of generator sets includes models from 3.5 kW for basic comfort to 30 kW "full comfort" power rating.

### WhisperPower produces three main product series:

The Super Compact 3600 rpm range of diesel generators up to 11 kW, the Super Quiet line of 1800 rpm sets from 5.7 kW up to 30 kW and the new GENVERTER range of variable speed inverter integrated products. The GV 4 Basic (3.8.kw) and 7i (7 kW) are now available for 230 V 50 Hz output. North American versions will follow.

Technology used for the 3600 & 1800 RPM models: synchronous alternator technology, all single phase back ends are water cooled, hardly

### Six 1800 rpm models, three 3600 models and a new generation of variable speed GENVERTER models coming up.

WhisperPower integrates marinized Mitsubshi and Kubota engines to operate in the marine environment. For the one cylinder M-SC 3.5 a marinized industrial Kubota engine is used while the GENVERTER one cylinder models operate with WhisperPower designed engines. All standard WhisperPower products can be delivered immediately from inventory and our flexible manufacturing techniques allow for a timely fulfillment of customized units demands.

### We make the product the way you want it:

- WhisperPower sets with dry exhaust. (for vessels operating in shallow waters or inland waterways)
- WhisperPower sets with PTO (Power Take Off) for installation of a hydraulic pump, mounted to the generator end to provide up to 25KW of hydraulic power to operate hydraulic equipment.
- WhisperPower sets can be manufactured with isolated ground for use on aluminum vessels.

### Complete installation kits

- We offer complete installation kits of the highest quality: non-flammable water exhaust separators and waterlocks (Delta exhaust parts/ ABYC compliant), rubber hoses, fuel kit with fuel/water separators, anti-siphon kits, starter battery kit, etc.
- We are able to supply our systems with specific certifications like Lloyds, GL or ABS.
- All our models are available for 50 Hz use as well.

# Technical Data



smart energy solutions

**SC 6P**  
6 kW  
3.600 rpm

diesel generator	Art. No.	40902055	40902025
Specifications		M-SC 6P Marine	W-SC 6 Mobile/Land
Nominal power		6 kW @ 3600 rpm	6 kW @ 3600 rpm
Nominal voltage		120/240V - 48/24A	120/240V - 50/25A
Output frequency		60 Hz	60 Hz*
Power factor / cos phi		1	1
Voltage tolerance		± 5%	± 5%
Frequency tolerance (Hz)		± 5%	± 1%
Voltage regulation		Capacitor based	Capacitor based
Starter battery		12 V	12 V
Battery charge current		alternator 40 A	alternator 40 A
Alternator		watercooled, no brushes, synchronous	
Sound level		56 dBA	56 dBA
Dimensions (l x w x h) inches incl. sound shield		26" x 19.5" x 21.65"	26" x 19.5" x 21.65"
Dry weight		392 lbs	392 lbs
Location oil refill cap		top & side	top & side
Max. operation angle (all directions)		25°	25°
Wet / Dry exhaust pipe		Ø1 5/8" (water cooled)	Ø 1 inch BSP inner thread (dry)
Material / Color		sheet polyester / RAL 9003	
Temperature range operational		-4°F to 104°F	-4°F to 104°F
Protection degree		Engine compartment IP44, Electronic compartment IP23	
Relative humidity		Max. 95% relative humidity, none condensing	
Remote control		Digital Diesel Control	Digital Diesel Control
Specifications diesel engine			
Engine model (Mitsubishi)		L2E	L2E
Number of cylinders		2	2
Bore & stroke inches		2.8" x 2.75"	2.8" x 2.75"
Cylinder capacity		38.75 in <sup>3</sup>	38.75 in <sup>3</sup>
Air consumption		33.54ft <sup>3</sup> /min	33.54ft <sup>3</sup> /min
Engine cooling		Intercooled	Intercooled
Fuel consumption (no load-full load)		0.26-0.66gph	0.26-0.66gph

\*Fitted with electronic governor



## Water inlet kit

consisting of: Water strainer, hoses, hose clamps, through-hull fitting and seacock



## DELTA Water/gas separator kit

consisting of: Water/gas separator with unique rotating connections, through-hull fitting, hoses, hose clamps and seacock



## DELTA Exhaust kit

consisting of: Exhaust silencer/waterlock muffler with unique rotating connections, through-hull fitting, hoses and hose clamps

## Dry exhaust kit

There are specific situations where the implementation of a Dry Exhaust kit is a good alternative contains two silencers: an absorption and a resonance muffler including fitting material

## Options

Water inlet Kit	40230211
Anti syphon Kit	40230273
DELTA exhaust Kit	40230251
DELTA water exhaust separator Kit	40230261
Water heater Kit	40245030
Base plate Kit	40230209
Radiator cooling Kit engine	40201879

## Art. No.

## Options

Radiator cooling Kit alternator	40201878
Anti vibration Mounts	40230217
Dry exhaust Kit	40201320

## Spare Part Kits

Maintenance Kit A	40201260
Maintenance Kit B	40201261

## Art. No.

## Digital Diesel Control:

Each WhisperPower generator comes standard with the Digital Diesel Control power system management. This remote panel has a one touch start/stop facility and provides complete diagnostics and performance data.

Digital Diesel Control continuously monitors vital functions, including frequency,

AC voltage and engine components, such as oil pressure, exhaust temperature, cooling water temperature and starter battery voltage. Maintenance schedules are alerted per settings. Visual and audible warnings alert you the instance something is wrong and the safety shut-downs will protect the generator.


One-touch start-and stop buttons

Select: your access to various menus



## Load information at a glance

Green LEDs displays the status for nominal capacity (five-step scale to 100%). Overload is signaled by a red light and the generator will shutdown.

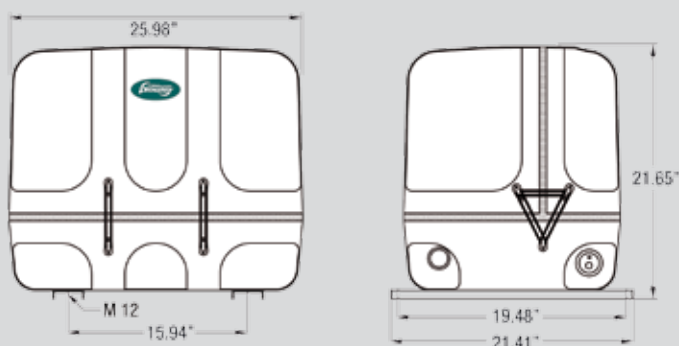

MANUFACTURING: WhisperPower BV Kelvinlaan 82, 9207 JB Drachten, The Netherlands.  
Tel: +31 (0) 512 571 550, Fax: +31 (0) 512 571 599, info@whisperpower.com, www.whisperpower.com

## DISTRIBUTION NORTH & SOUTH AMERICA:

WhisperPower USA 4700 SW 51st Street, Suite 212, Davie, FL 33314

Toll free: +1-888-423-2664, Fax: +1-954-331-4532, sales@whisperpower.us, www.whisperpower.us

