


# 4307 AC Eight Branch Circuits With Shore And Generator Mains

## 4307 AC Eight Branch Circuits With Shore And Generator Mains 120 VAC 60 HZ, (or 240 VAC 50 HZ)

### GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
  - Over 2000 interchangeable function labels available.
  - Panel face is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
  - High accuracy rear mounted meters. Digital meters are optional.
  - LED Indicators provided on all Premier Line Panels
  - Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
  - Hydraulic/magnetic, trip free Circuit Breakers.
  - Voltage and Shore Cord Current: 30 AMPS, 120 VAC-60 HZ USA is standard. Also available in 240 VAC-50 HZ. European is optional.
  - Main Breakers: Shore: 30 AMP, 120 VAC, 60 HZ, and 240 VAC, 50 HZ . Generator: 50 AMP standard. Other ratings available.
  - Branch Circuits: Available in 5, 10, 15, 20, 25, 30, 40, and 50 A.
  - Metering: 0-150 VAC scale Voltmeter and 0-50 ACA scale Ammeter - standard. Other analog scales and digital meters available.
  - Generator: Rocker switches on both preheat and stop/start
  - Dimensions: 17 3/4" W X 6" H X 3 1/2" D.
- Color: Black is standard. Optional: White, Gray and Beige.

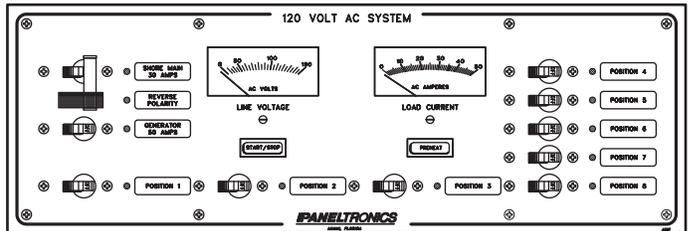

4307